


Specifications

- Wear Layer: 22 mil (0.55 mm)
- Overall Thickness: 2.5 mm
- Size: 18" x 18" (457 mm x 457 mm)
- 100% Phthalate Free
- Reach Compliant
- Warranty: Lifetime Residential, 20-Year Heavy Commercial



- Patented Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength
- Low-gloss finish

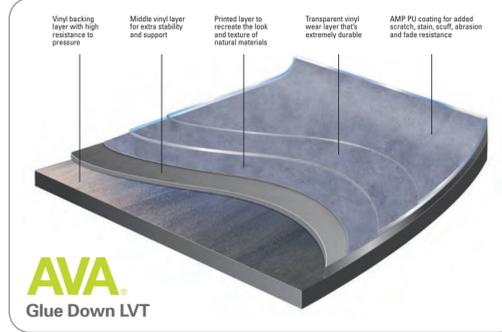


AVA
Glue Down LVT

ASTM F1700 SOLID VINYL TILE:	CLASS III, TYPE B
ASTM F2055 SIZE:	PASSES, ± 0.4 MM
ASTM F387 PRODUCT THICKNESS:	PASSES, ± 0.13 MM
ASTM F2055 SQUARENESS:	PASSES, ± 0.25 MM
ASTM F1914 RESIDUAL INDENTATION:	PASSES, ≤ 0.2 MM
ASTM F137 FLEXIBILITY:	PASSES, 25.4 MM MANDREL
ASTM F2199 DIMENSIONAL STABILITY:	PASSES, <0.5 MM PER LIN. FT.
ASTM F925 CHEMICAL RESISTANCE:	PASSES ASTM F1700 REQUIREMENTS
ASTM F1514 HEAT COLOR STABILITY:	PASSES, < Δ8E
ASTM F1515 LIGHT COLOR STABILITY:	PASSES, < Δ8E
ASTM F970 STATIC LOAD LIMIT (MODIFIED):	≤ 0.13 MM INDENT, 1,200 LBS.
ASTM E648 (NFPA 253) CRITICAL RADIANT FLUX:	CLASS I, >0.45 W/CM ²
ASTM E662 (NFPA 258) SMOKE DENSITY:	PASSES, <450
ASTM D2047 SLIP RESISTANCE:	>0.5 SCOF (NO RAMPS)



Monument SP043



Raven SP036

AVA

With worldwide sales offices and distribution partners, AVA is a leader in the design and manufacturing of innovative and sustainable resilient flooring. Established in 1984, AVA has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT.

AVA® and 2SPRK™ are trademarks of Novalis® Innovative Flooring.

© 2021 Novalis® Innovative Flooring



avaflor.com • 877.861.5292
sales@avaflor.com



Black-eyed Susan, Cape Cod, Gettysburg, Keystone, Oriole

AVA 2SPRK



NOVALIS
INNOVATIVE FLOORING

AVA 2SPRK

AVA 2SPRK



Pale Ale, Sea Cadet, North Shore, Cardinal



Featuring 18 updated colors for a total of 38 dynamic colorways, AVA® 2SPRK™ delivers one of the largest palettes of impactful design options in the LVT product category.


2SPRK™ has crisp on-trend essential colors and a blend of coordinating neutral tones perfect for Education, Retail, Corporate, Hospitality and Healthcare installations. With its AMP coating and an extremely durable 22 mil wear layer, 2SPRK™ provides the perfect long-term flooring solution for most commercial applications, including heavy traffic areas with heavy rolling loads.




Land-Ho SP024



Top o' the Hill SP026



Gettysburg SP047




Chesapeake SP055



Three Rivers SP048



Cape Cod SP044



Inner Harbor SP021



Metro Retro SP027




Dinosaur SP042



Dress Blues SP029



Sea Cadet SP045



Not Your Ravens Purple SP020




Grape SP046




Capone SP053




Steamed Crabs SP016



Cardinal SP056



O' Say SP009



Black-eyed Susan SP010



Hoist the Sail SP002



Sandstone SP003



Pale Ale SP041



Front Stoop SP031




Under the Boardwalk SP011



Row Home SP012



Fieldstone SP049



Oriole SP052



Bristol SP051



Brownstone SP014




Cobblestone SP013



Keystone SP050



Steel Yourself SP035



On the Half Shell SP033



Dark White SP001



Arlington SP039



Rushmore SP040



North Shore SP054