


2FAVE™ Specifications

- MADE IN USA
- HDC Clic
- Wear Layer: 12mil (.30 mm) or 22 mil (.55 mm)
- Overall Thickness: 5.0 mm
- Size: 5.75" x 47.75" (146 mm x 1212 mm)
- Microbevel Edge
- Waterproof
- 100% Phthalate Free
- Warranty: 15-Year Commercial (22mil), 10-Year Commercial (12mil) & Lifetime Residential

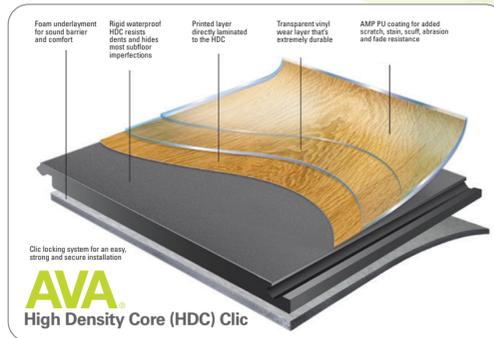

- AMP ADVANTAGE**
- Patented Coating
 - 30% More Scratch Resistance Over Typical Coatings
 - Exceptional Wear Resistance and High Strength
 - Low-gloss finish

ASTM F3261 RIGID CORE SPECIFICATION:	CLASS I, TYPE B, GRADE 1, BACKING CLASS B
ISO 24337 SIZE & SQUARENESS:	PASSES, ± 1.5 MM SIZE, ± 0.25 MM SQUARENESS
ASTM F387 THICKNESS OF FLOORING W/FOAM LAYER:	PASSES, ± 0.2 MM
ASTM F410 WEAR LAYER THICKNESS:	PASSES, ≥ 0.5 MM
ISO 24337 FLATNESS:	PASSES, ± 0.2 MM WIDTH, < 0.2% LENGTH
ISO 24337 JOINT OPENING:	PASSES, ≤ 0.2 MM
ISO 24337 JOINT LEDGING:	PASSES, ≤ 0.15 MM
ASTM F1914 RESIDUAL INDENTATION:	PASSES, ≤ 0.18 MM
ASTM F1914 SURFACE INTEGRITY:	PASSES, NO PUNCTURE
ISO 23999 DIMENSIONAL STABILITY:	PASSES, <0.2% / LIN. FT.
ISO 23999 CURL:	PASSES, ≤ 2 MM
ASTM F925 CHEMICAL RESISTANCE:	PASSES ASTM F3621 REQUIREMENTS
ASTM F1514 RESISTANCE TO HEAT:	PASSES, < ΔE 8
ASTM F1515 RESISTANCE TO LIGHT:	PASSES, < ΔE 8
ASTM F970 STATIC LOAD LIMIT:	PASSES, ≤ 0.13 MM INDENT, 250 LBS.
ASTM E648 (NFPA 253) CRITICAL RADIANT FLUX:	CLASS I, >0.45 W/CM ²
ASTM E662 (NFPA 258) SMOKE DENSITY:	PASSES, <450
ASTM D2047 / UL 410 - SLIP RESISTANCE:	> 0.5 SCOF (NO RAMPS)
ASTM E492 / E989 IMPACT INSULATION CLASS:	5MM - IIC 56** ¹ , 66 ²
ASTM E90 / E413 SOUND TRANSMISSION CLASS:	STC 50*, 60*, 61 ²
ASTM E2179 DELTA IMPACT INSULATION CLASS:	ΔIIC 25*

* 6" concrete | ¹ 18" OWT | ² 16" concrete, gypsum ceiling

AVA

With worldwide sales offices and distribution partners, AVA is a leader in the design and manufacturing of innovative and sustainable resilient flooring. Established in 1984, AVA has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT.

AVA[®] and 2FAVE[™] are trademarks of Novalis[®] Innovative Flooring.

© 2024 Novalis[®] Innovative Flooring



avaflor.com • 877.861.5292
sales@avaflor.com



European Walnut Chocolate



NOVALIS[®]
INNOVATIVE FLOORING

AVA 2FAVE

AVA 2FAVE



Alabaster Oak Sierra



With three new colors, AVA[®] 2FAVE[™] brings a MADE IN THE USA impact to 10 favorite AVA[®] designs. 2FAVE[™]'s High Density Core (HDC) provides a true, waterproof rigid-core performance in large 5.75" x 47.75" clic planks with attached acoustical backing that provides superior sound control performance.

AVA[®]'s proprietary AMP Advantage coating makes 2FAVE[™] the perfect solution for your heavy-traffic areas that need durability and ease of maintenance. 2FAVE[™] is the ideal flooring for single family homes, multi-family units, hospitality rooms and amenity spaces, as well as many other applications where design and durability are the focus.



Alpine Oak Khaki 12 mil: AO005S-0503U / 22 mil: AO005S-5055U



European Walnut Chocolate 12 mil: EW001S-0503U / 22 mil: EW001S-5055U



Acoustical Backing



Tuscany Oak Snow 12 mil: TO001S-0503U / 22 mil: TO001S-5055U



Tuscany Oak Mist 12 mil: TO002S-0503U / 22 mil: TO002S-5055U



Tuscany Oak Medallion 12 mil: TO009S-0503U / 22 mil: TO009S-5055U



Alabaster Oak Sierra 12 mil: AB001S-0503U / 22 mil: AB001S-5055U



English Oak Veil 12 mil: EO002S-0503U / 22 mil: EO002S-5055U



Tuscany Oak Peanut 12 mil: TO008S-0503U / 22 mil: TO008S-5055U



Baltic Oak Taupe 12 mil: BO002S-0503U / 22 mil: BO002S-5055U



Baltic Oak Suede 12 mil: BO003S-0503U / 22 mil: BO003S-5055U



English Oak Veil

