## AVA 2STYL



Strong, secure HDC clic planks feature IXPE acoustical backing for sound reduction, shock absorption and comfort underfoot.

by NOVALIS

avaflor.com

standard glue down and high density























With worldwide sales offices and distribution partners, Novalis® is a leader in the design and manufacturing of innovative and sustainable resilient flooring. Established in 1984, Novalis has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT.

© 2019 Novalis® Innovative Flooring

## AVA<sub>8</sub>2STYL



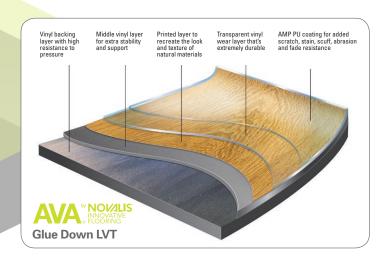



## Glue Down Specifications

- Wear Layer: 8 mil (0.2 mm)
- · Overall Thickness: 2.0 mm
- Size: 6" x 48"
- 100% Phthalate Free
- Reach Compliant
- Warranty: 10-Year Residential and 3-Year Light Commercial



- · Patent-Pending Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength

## **HDC** Specifications

- Wear Layer: 8 mil (0.2 mm)
- Overall Thickness: 4.2 mm
- Size: 5.75" x 47.75"
- 100% Phthalate Free
- Reach Compliant
- Warranty: 12-Year Residential



- · Patent-Pending Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength



Baltic Oak Suede

Glue Down: BO2003 / HDC: BO2003D



Baltic Oak Taupe

Glue Down: BO2002 / HDC: BO2002D



Baltic Oak Hazel

Glue Down: BO2006 / HDC: BO2006D



Baltic Oak Corduroy

Glue Down: BO2005 / HDC: BO2005D



Glue Down: BO2004 / HDC: BO2004D



Glue Down: CW2002 / HDC: CW2002D



Glue Down: CW2001 / HDC: CW2001D



Glue Down: SA2003 / HDC: SA2003D



Glue Down: SA2002 / HDC: SA2002D



European Walnut Chocolate Glue Down: EW2001 / HDC: EW2001D

Talk to your AVA® representative to get our 2STYL™ architectural folder and see which products would be best for your next project.

