
Specifications

- Wear Layer: 20 mil (0.5 mm)
- Overall Thickness: 6.5 mm
- Available as Special Order: 6.0 mm 12 mil
- Size: 6" x 48"
- 100% Phthalate Free
- Reach Compliant
- Warranty: 10-Year Commercial & Lifetime Residential



- Patent-Pending Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength



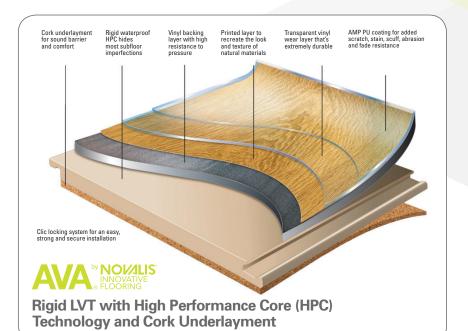

Back of SMPL Plank

ASTM E492 IMPACT INSULATION CLASS:	IIC 54
ASTM E90 AIRBORNE SOUND TRANSMISSION:	STC 52
ASTM F970-07 STATIC LOAD LIMIT:	PASSES
ASTM E648 CRITICAL RADIANT FLUX:	CLASS 1
ASTM E662 SMOKE DENSITY:	PASSES
ASTM F925 STAIN & CHEMICAL RESISTANCE:	EXCELLENT

by **NOVALIS** INNOVATIVE ® FLOORING

Other products in the AVA collection:

AVA DSGN® AVA SNSE® AVA SPRK®

AVA VRSE™ AVA 2STYL™ AVA RSRV™

With worldwide sales offices and distribution partners, Novalis® is a leader in the design and manufacturing of innovative and sustainable resilient flooring. Established in 1984, Novalis has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT.

AVA®, DSGN®, SNSE®, SPRK®, VRSE™, 2STYL™ and RSRV™ are trademarks of Novalis® Innovative Flooring.

© 2019 Novalis® Innovative Flooring

avaflor.com • 877.861.5292




by Kendall McCaugherty, Hall +Merrick Photography. Designer: Eastlake Studio.





AVA.SMPL. AVA.SMPL.

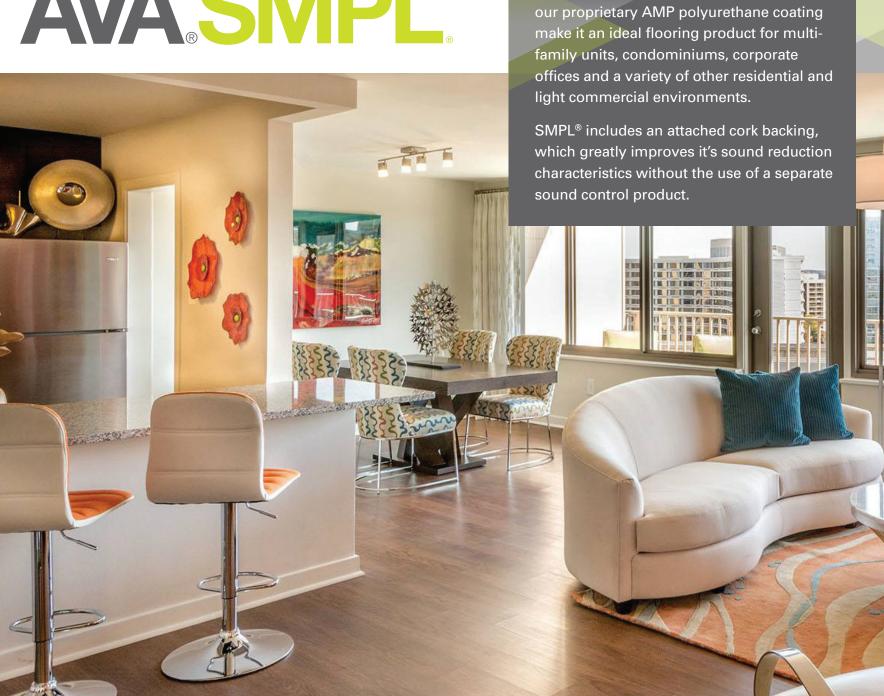


With its HPC (High Performance Core) clic construction, SMPL® is a rigid, floating floor system featuring a unique drop-lock mechanism for quick and easy installation

with minimal subfloor preparation.

waterproof core, durable wear layer and

AVA.SMPL.

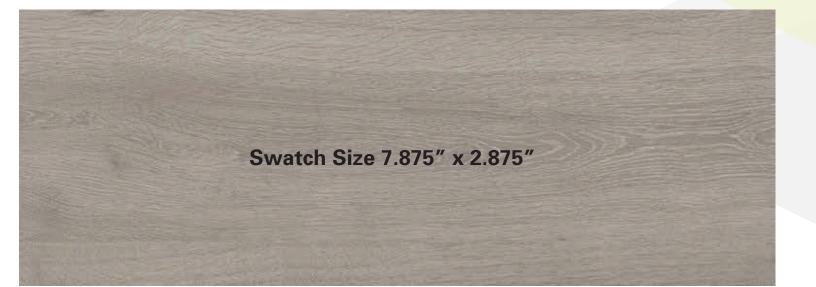

Tuscany Oak Snow TO001H



Baltic Oak Taupe BO002H



Carolina Oak Natural CO001H





Carolina Oak Gunstock CO004H



Tuscany Oak Wenge TO006H





Tuscany Oak Mist TO002H



Tuscany Oak Steel TO00



Baltic Oak Suede BO003H



Alpine Oak Khaki AO005H



European Walnut Chocolate EW001H